




### 3 Troughing sets

#### transom A3 S-35°

For upper troughing sets, extra heavy with three rollers, plain or with impact rings

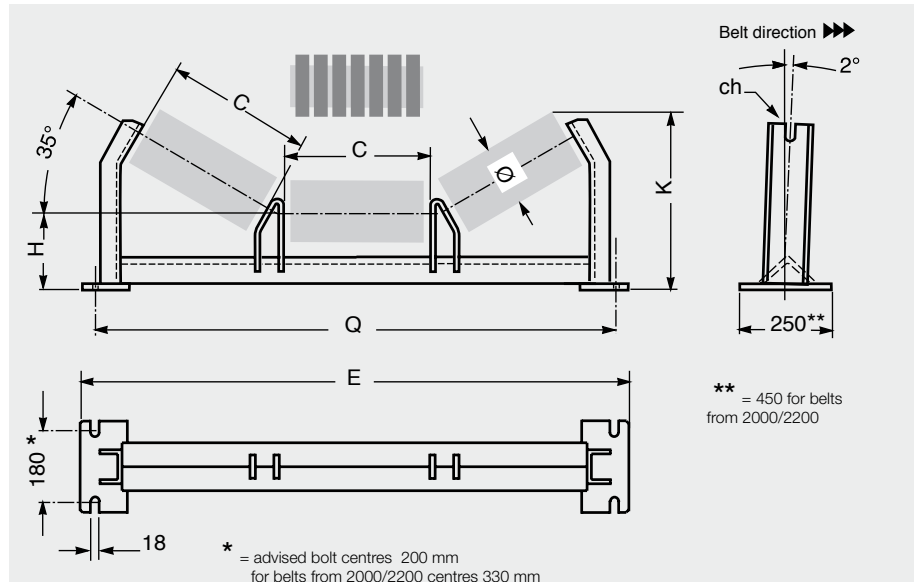

#### for rollers series:

##### PSV 2, 3

ø 133  
spindle 25  
bearing 6205, 6305  
ch = 18

##### PSV 4, 5

ø 159  
spindle 30  
bearing 6206, 6306  
ch = 22

##### PSV/7-FHD

ø 159, 194  
spindle 40  
bearing 6308  
ch = 32



A3 S-35° Standard

**Example of ordering**  
A3 S/77, 1400, F22, H205

for special designs  
see page 200

**transom**  
**A3 S-35°**

order codes	belt width mm	roller			transom					weight without rollers Kg	
		∅ mm	C	ch	capacity Kg	H mm	K <sub>max</sub>	Q	E		
A3 S 1/80	800	133	18 - 22	323	289	155	407	1090	1150	14.1	
A3 S /70				460	163	415	1090	1150	16.2		
A3 S 1/82	1000			388	244	155	444	1290	1350	15.6	
A3 S 2/83				388	163	451	1290	1350	18.1		
A3 S 3/84	1200			581	170	459	1290	1350	21.0		
A3 S 1/87				473	204	155	493	1540	1600	17.5	
A3 S 2/88				325	163	500	1540	1600	20.4		
A3 S 3/89				487	170	508	1540	1600	24.0		
A3 S /74				634	178	516	1540	1600	25.9		
A3 S 1/8C				1400	538	431	170	546	1740	1800	26.2
A3 S 2/8D					561	178	553	1740	1800	28.4	
A3 S /76				710	185	560	1740	1800	30.6		
A3 S 1/8G	1600			608	387	170	586	1940	2000	28.6	
A3 S 2/8H				503	178	593	1940	2000	31.0		
A3 S /78				637	185	600	1940	2000	33.5		
A3 S 1/8K				446	178	633	2190	2250	43.2		
A3 S 2/8N	1800	678	667	185	640	2190	2250	48.7			
A3 S 2/81	800	159	18 - 22	323	289	176	437	1090	1150	15.8	
A3 S /71				460	183	445	1090	1150	18.0		
A3 S 4/85	1000			388	388	183	475	1290	1350	19.7	
A3 S 5/86				581	190	490	1290	1350	22.6		
A3 S 4/8A	1200	473	325	183	532	1540	1600	21.7			
A3 S 5/8B		487	190	539	1540	1600	25.5				
A3 S /75		634	198	547	1540	1600	27.4				
A3 S 3/8E	1400	538	431	190	576	1740	1800	27.8			
A3 S 4/8F		561	198	583	1740	1800	30.0				
A3 S /77	1600	159	18 - 22 - 32	710	205	591	1740	1800	32.2		
A3 S 3/8I				608	387	190	616	1940	2000	30.1	
A3 S 4/8J				503	198	588	1940	2000	32.6		
A3 S /79				637	205	631	1940	2000	35.0		
A3 S 3/8P				1800	678	446	198	663	2190	2250	41.0
A3 S 4/8Q				667	205	671	2190	2250	49.8		
A3 S 1/8T				2000	758	604	210	717	2420	2520	62.0
A3 S 2/8U				909	225	732	2420	2520	70.0		
A3 S 1/8X	2200	194	32	808	558	210	746	2620	2720	66.1	
A3 S 2/8Y				840	225	761	2620	2720	74.6		
A3 S 5/8L	1600	194	32	608	503	265	672	1940	2000	40.7	
A3 S 6/8M				753	273	680	1940	2000	48.7		
A3 S 5/8R	1800	194	32	678	446	265	712	2190	2250	43.5	
A3 S 6/8S				667	273	720	2190	2250	53.0		
A3 S 3/8V	2000	194	32	758	604	277	803	2420	2520	64.6	
A3 S 4/8W				909	290	816	2420	2520	72.3		
A3 S 3/8Z	2200	194	32	808	558	277	832	2620	2720	68.3	
A3 S 4/90				840	290	845	2620	2720	76.7		

On request transoms may be supplied with different dimensions, characteristics and angles for belt widths up to 3,000 mm.