3 Troughing sets

transom

A3 P-30°

For heavy upper troughing sets with three rollers, plain or with impact rings

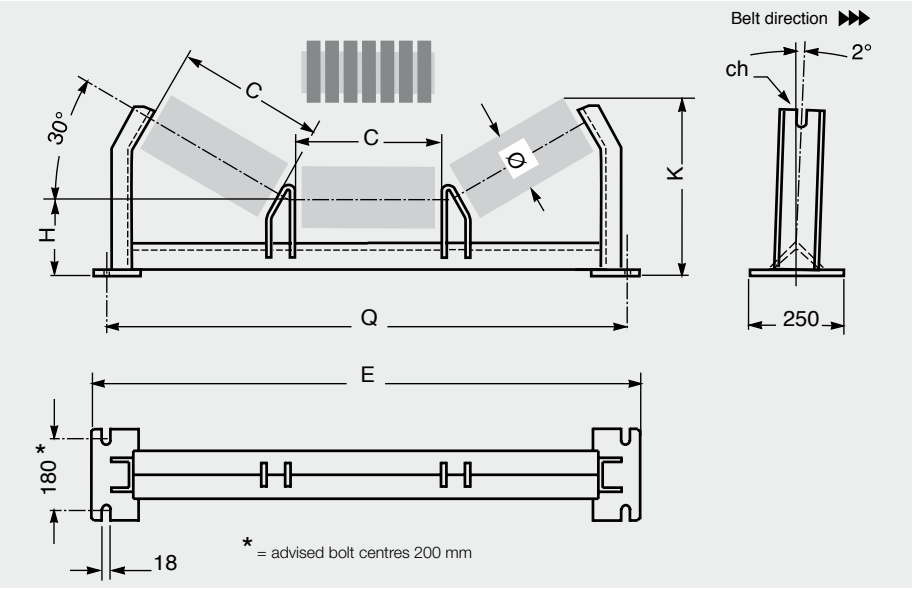

for rollers series:

PSV 1
ø 89, 108,133
spindle 20
bearing 6204
ch = 14

PSV 2, 3
ø 133, 159
spindle 25
bearing 6205,6305
ch = 18

PSV 4, 5
ø 133, 159
spindle 30
bearing 6206, 6306
ch = 22

A3 P-30° Standard

Example of ordering
A3P/54,1200, 4, F18, H168

for special designs
see page 200

transom
A3 P-30°

order codes	belt width mm	roller Ø mm	C	ch	transom capacity Kg	H mm	K max	Q	E	weight without rollers Kg
A3 P 1/5A	**800**	89 - 108	**323**	14	289	**133**	347	1090	1150	11.5
A3 P 2/5B					460	**140**	355	1090	1150	13.6
A3 P 1/5E	**1000**		**388**		244	**133**	380	1290	1350	12.7
A3 P 2/5F					388	**140**	387	1290	1350	15.3
A3 P 1/5K	**1200**		**473**		204	**133**	422	1540	1600	14.4
A3 P 2/5L					325	**140**	429	1540	1600	17.3
A3 P 3/5C	**800**	133	**323**	14 - 18 - 22	289	**153**	380	1090	1150	12.9
A3 P /50					460	**160**	388	1090	1150	15.0
A3 P 3/5G	**1000**		**388**		244	**153**	413	1290	1350	15.5
A3 P 4/5H					388	**160**	420	1290	1350	18.1
A3 P /52					581	**168**	428	1290	1350	21.0
A3 P 3/5M	**1200**		**473**		204	**153**	455	1540	1600	17.3
A3 P 4/5N					325	**160**	462	1540	1600	20.3
A3 P /54					487	**168**	470	1540	1600	23.7
A3 P 1/5R	**1400**		**538**	18 - 22	288	**160**	496	1740	1800	22.1
A3 P 2/5S					431	**168**	503	1740	1800	26.1
A3 P /56					561	**176**	511	1740	1800	28.3
A3 P 1/5V	**1600**		**608**		387	**168**	538	1940	2000	28.3
A3 P /58					503	**176**	546	1940	2000	30.7
A3 P 4/5D	**800**	159	**323**	18 - 22	284	**173**	413	1090	1150	13.8
A3 P /51					460	**180**	420	1090	1150	15.9
A3 P 5/5I	**1000**		**388**		244	**173**	445	1290	1350	16.6
A3 P 6/5J					388	**180**	452	1290	1350	19.1
A3 P /53					581	**188**	460	1290	1350	22.0
A3 P 5/5P	**1200**		**473**		204	**173**	475	1540	1600	18.3
A3 P 6/5Q					325	**180**	482	1540	1600	21.3
A3 P /55					487	**188**	490	1540	1600	24.8
A3 P 3/5T	**1400**		**538**		288	**180**	518	1740	1800	23.2
A3 P 4/5U					431	**188**	525	1740	1800	27.1
A3 P /57					561	**196**	533	1740	1800	29.3
A3 P 2/5W	**1600**		**608**		387	**188**	580	1940	2000	29.4
A3 P /59					503	**196**	588	1940	2000	31.8
A3 P 1/5X	**1800**		**678**		446	**196**	615	2190	2250	34.9
A3 P 2/5Y					667	**203**	623	2190	2250	43.9

On request transoms may be supplied with different dimensions, characteristics and angles.