


3 Troughing sets

transom

A3 P-30°

For heavy upper troughing sets with three rollers, plain or with impact rings

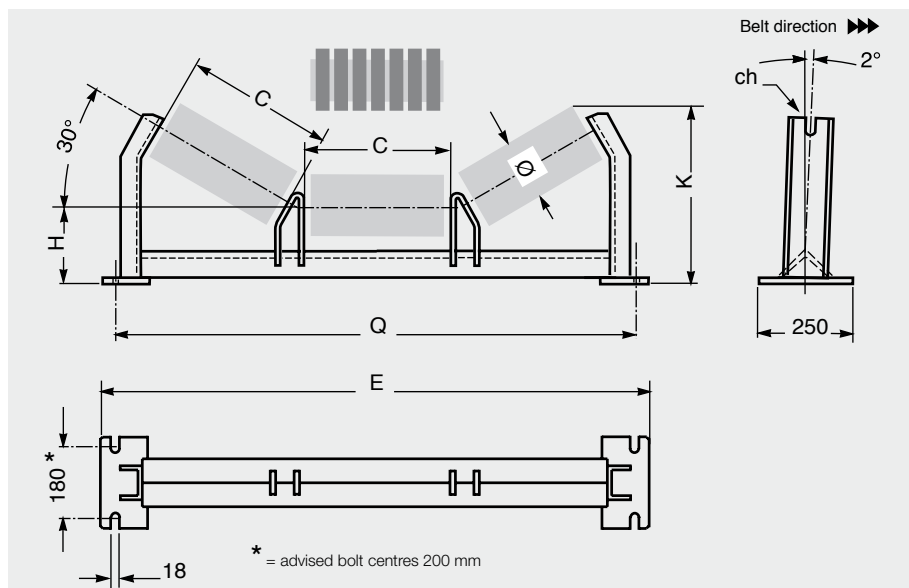

for rollers series:

PSV 1

Ø 89, 108, 133
spindle 20
bearing 6204
ch = 14

PSV 2, 3

Ø 133, 159
spindle 25
bearing 6205, 6305
ch = 18

PSV 4, 5

Ø 133, 159
spindle 30
bearing 6206, 6306
ch = 22



A3 P-30° Standard

Example of ordering
A3P/54,1200, 4, F18, H168

for special designs
see page 200

transom
A3 P-30°

order codes	belt	roller			transom					weight without rollers Kg
	width mm	Ø mm	C	ch	capacity Kg	H mm	K _{max}	Q	E	
A3 P 1/5A A3 P 2/5B	800	89 - 108	323	14	289	133	347	1090	1150	11.5
A3 P 1/5E A3 P 2/5F	1000		388		460	140	355	1090	1150	13.6
A3 P 1/5K A3 P 2/5L	1200		473		244	133	380	1290	1350	12.7
					388	140	387	1290	1350	15.3
					204	133	422	1540	1600	14.4
					325	140	429	1540	1600	17.3
A3 P 3/5C A3 P /50	800	133	323	14 - 18 - 22	289	153	380	1090	1150	12.9
A3 P 3/5G A3 P 4/5H A3 P /52	1000		388		460	160	388	1090	1150	15.0
A3 P 3/5M A3 P 4/5N A3 P /54	1200		473		244	153	413	1290	1350	15.5
					388	160	420	1290	1350	18.1
					581	168	428	1290	1350	21.0
					204	153	455	1540	1600	17.3
					325	160	462	1540	1600	20.3
					487	168	470	1540	1600	23.7
A3 P 1/5R A3 P 2/5S A3 P /56	1400		538		288	160	496	1740	1800	22.1
A3 P 1/5V A3 P /58	1600		608		431	168	503	1740	1800	26.1
					561	176	511	1740	1800	28.3
					387	168	538	1940	2000	28.3
					503	176	546	1940	2000	30.7
A3 P 4/5D A3 P /51	800	159	323	18 - 22	284	173	413	1090	1150	13.8
A3 P 5/5I A3 P 6/5J A3 P /53	1000		388		460	180	420	1090	1150	15.9
A3 P 5/5P A3 P 6/5Q A3 P /55	1200		473		244	173	445	1290	1350	16.6
A3 P 3/5T A3 P 4/5U A3 P /57	1400		538		388	180	452	1290	1350	19.1
A3 P 2/5W A3 P /59	1600		608		581	188	460	1290	1350	22.0
A3 P 1/5X A3 P 2/5Y	1800		678		204	173	475	1540	1600	18.3
					325	180	482	1540	1600	21.3
					487	188	490	1540	1600	24.8
					288	180	518	1740	1800	23.2
					431	188	525	1740	1800	27.1
					561	196	533	1740	1800	29.3
					387	188	580	1940	2000	29.4
					503	196	588	1940	2000	31.8
					446	196	615	2190		