transom

A3 M-30°

For medium upper troughing sets with three rollers, plain or with impact rings

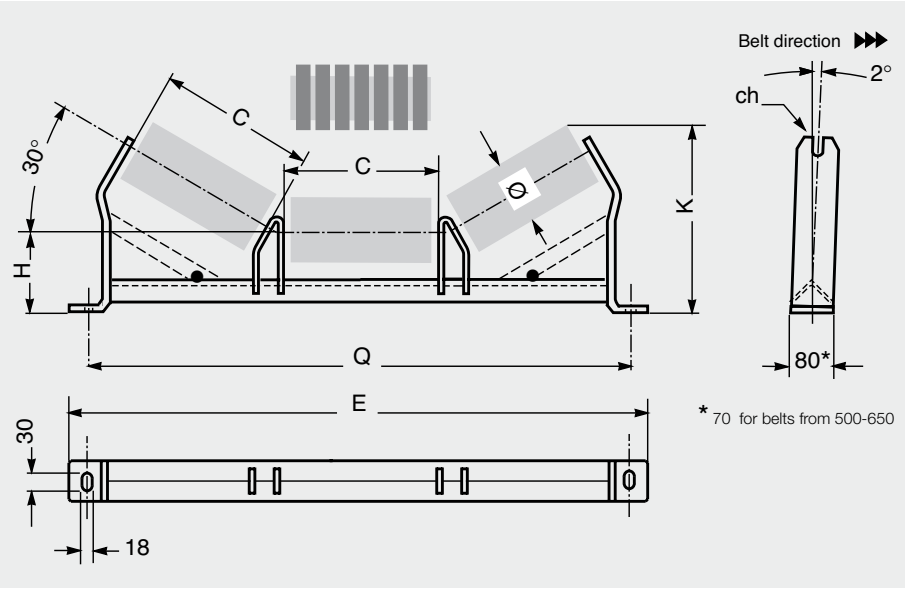

- Reinforcing only for frames with order code: A3 M /24 - A3 M /28 - A3 M /32
  A3 M /26 - A3 M /30 - A3 M /34
  for belt widths: 800 - 1000 - 1200

for rollers series:

PSV 1
ø 89, 108
spindle 20
bearing 6204
ch = 14

PL
ø 90, 110, 140
PLF
ø 89, 108, 133
spindle 20
bearing 6204
ch = 30, 14

A3 M-30° Standard

A3 MT-30°

Special design with bracket

for fixing onto the transom without drilling a hole in the frame

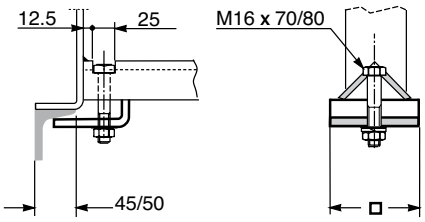

□ Bracket width available 90-100-110

Example of ordering
A3M/28, 1000, F14, H140, Z

for special designs
see pages pag. 200

transom

A3 M-30°

order codes	belt width mm	roller Ø mm	C	ch	transom capacity Kg	H mm	K max	Q	E	weight without rollers Kg
A3 M 1/3A	**500**	89 - 90 - 108 -110	**208**	14 - 30	247	**135**	292	740	800	6.0
A3 M 1/3E	**650**		**258**		205	**135**	317	890	950	6.7
A3 M /22					354	**135**	317	890	950	8.1
A3 M 1/3K	**800**		**323**		289	**140**	354	1090	1150	10.7
A3 M /24					460	**140**	354	1090	1150	13.3
A3 M 1/3P	**1000**		**388**		244	**140**	387	1290	1350	12.2
A3 M /28					388	**140**	387	1290	1350	15.1
A3 M 1/3J	**1200**		**473**		204	**140**	429	1540	1600	14.0
A3 M /32					325	**140**	429	1540	1600	17.4
A3 M 2/3C	**500**	133 - 140	**208**	14 - 30	247	**155**	325	740	800	6.5
A3 M 2/3G	**650**		**258**		205	**155**	350	890	950	7.2
A3 M 3/3I					354	**155**	350	890	950	8.6
A3 M 2/3M	**800**		**323**		289	**160**	387	1090	1150	11.4
A3 M /26					460	**160**	387	1090	1150	13.9
A3 M 2/3R	**1000**		**388**		244	**160**	420	1290	1350	12.7
A3 M /30					388	**160**	420	1290	1350	15.9
A3 M 2/3V	**1200**		**473**		204	**160**	462	1540	1600	14.5
A3 M /34					325	**160**	462	1540	1600	18.1

On request transoms may be supplied with different dimensions, characteristics and angles.