


3 Troughing sets

transom

A3 S-35°

For upper troughing sets, extra heavy with three rollers, plain or with impact rings

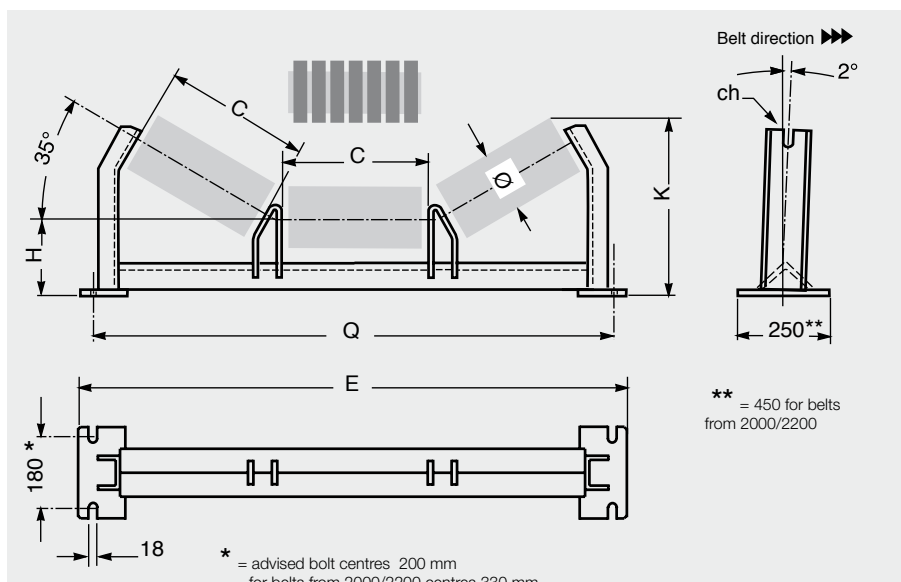

for rollers series:

PSV 2, 3

Ø 133

spindle 25

bearing 6205, 6305

ch = 18

PSV 4, 5

Ø 159

spindle 30

bearing 6206, 6306

ch = 22

PSV/7-FHD

Ø 159, 194

spindle 40

bearing 6308

ch = 32



A3 S-35° Standard

Example of ordering

A3 S/77, 1400, F22, H205

for special designs
see page 200

transom
A3 S-35°

order codes	belt	roller			transom					weight without rollers Kg
	width mm	Ø mm	C	ch	capacity Kg	H mm	K _{max}	Q	E	
A3 S 1/80	800	133	323	18 - 22	289	155	407	1090	1150	14.1
A3 S /70					460	163	415	1090	1150	16.2
A3 S 1/82	1000		388		244	155	444	1290	1350	15.6
A3 S 2/83					388	163	451	1290	1350	18.1
A3 S 3/84	1200		473		581	170	459	1290	1350	21.0
A3 S 1/87					204	155	493	1540	1600	17.5
A3 S 2/88					325	163	500	1540	1600	20.4
A3 S 3/89					487	170	508	1540	1600	24.0
A3 S /74					634	178	516	1540	1600	25.9
A3 S 1/8C	1400		538		431	170	546	1740	1800	26.2
A3 S 2/8D					561	178	553	1740	1800	28.4
A3 S /76					710	185	560	1740	1800	30.6
A3 S 1/8G	1600		608		387	170	586	1940	2000	28.6
A3 S 2/8H					503	178	593	1940	2000	31.0
A3 S /78					637	185	600	1940	2000	33.5
A3 S 1/8K	1800		678		446	178	633	2190	2250	43.2
A3 S 2/8N					667	185	640	2190	2250	48.7
A3 S 2/81	800	159	323	18 - 22	289	176	437	1090	1150	15.8
A3 S /71					460	183	445	1090	1150	18.0
A3 S 4/85	1000		388		388	183	475	1290	1350	19.7
A3 S 5/86					581	190	490	1290	1350	22.6
A3 S 4/8A	1200	159	473	18 - 22 - 32	325	183	532	1540	1600	21.7
A3 S 5/8B					487	190	539	1540	1600	25.5
A3 S /75					634	198	547	1540	1600	27.4
A3 S 3/8E	1400		538		431	190	576	1740	1800	27.8
A3 S 4/8F					561	198	583	1740	1800	30.0
A3 S /77					710	205	591	1740	1800	32.2
A3 S 3/8I	1600		608		387	190	616	1940	2000	30.1
A3 S 4/8J					503	198	588	1940	2000	32.6
A3 S /79					637	205	631	1940	2000	35.0
A3 S 3/8P	1800		678		446	198	663	2190	2250	41.0
A3 S 4/8Q					667	205	671	2190	2250	49.8
A3 S 1/8T	2000		758		604	210	717	2420	2520	62.0
A3 S 2/8U					909	225	732	2420	2520	70.0
A3 S 1/8X	2200		808		558	210	746	2620	2720	66.1
A3 S 2/8Y					840	225	761	2620	2720	74.6
A3 S 5/8L	1600	194	608	32	503	265	672	1940	2000	40.7
A3 S 6/8M					753	273	680	1940	2000	48.7
A3 S 5/8R	1800		678		446	265	712	2190	2250	43.5
A3 S 6/8S					667	273	720	2190	2250	53.0
A3 S 3/8V	2000		758		604	277	803	2420	2520	64.6
A3 S 4/8W					909	290	816	2420	2520	72.3
A3 S 3/8Z	2200		808		558	277	832	2620	2720	68.3
A3 S 4/90					840	290	845	2620	2720	76.7

On request transoms may be supplied with different dimensions, characteristics and angles for belt widths up to 3,000 mm.