




TERMOFLEX 300°C DOUBLE

912995

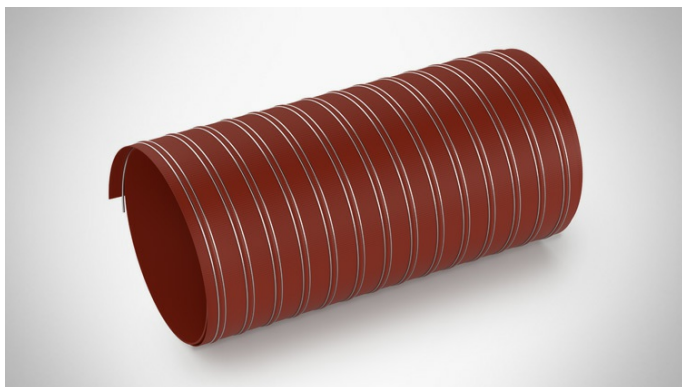

Hose made of silicone coated fibreglass with galvanised steel spiral embedded between two layers of textile, for suction of fumes and hot air.

DETAILS

 SMOOTH SURFACE * * * * *

 FLEXIBILITY * * * *

 ABRASION RESISTANCE * * * * *

 TEMPERATURE RANGE -85 °C 300 °C

 CHEMICAL RESISTANCE SILICONE Table

 CRUSHING RESISTANCE * * *

Ø nominal mm	Ø nominal inch	Ø i.d. mm	Ø o.d. mm	working pressure at 23 °C bar	vacuum 23 °C m/H ₂ O	bending radius mm	weight meter g/m	coil length m	Availability
51	2	51	56	2.5	5	51	331	4	On demand
63	2 1/2	63	68	2.4	4.5	63	415	4	On demand
70		70	75	2.3	4.5	70	500	4	On demand
76	3	76	81	2.3	4	76	531	4	On demand
83		83	87	2.1	4	83	590	4	On demand
89	3 1/2	89	94	2.1	3.95	89	610	4	On demand
102	4	102	107	1.9	3.05	102	710	4	On demand
114		114	120	1.6	2.8	114	845	4	On demand
121		121	127	1.5	2.7	121	980	4	On demand
127	5	127	133	1.4	2.2	127	925	4	On demand
140		140	146	1.8	1.8	140	1020	4	On demand
152	6	152	158	1.7	1.7	152	1200	4	On demand
178		178	189	1.2	1.2	178	1430	4	On demand
203	8	203	209	0.9	0.9	203	1650	4	On demand
254	10	254	260	0.4	0.4	254	1140	4	On demand
305	12	305	311	0.2	0.3	305	1580	4	On demand

All technical specifications apply to a temperature of 23° C ± 2° C (ISO 291)

The tolerance on all specifications ±5% (Tolerance Percentage is applicable on ALL DATA across our range)