




SUPERFLEX PU LR COMPATTATO 912905

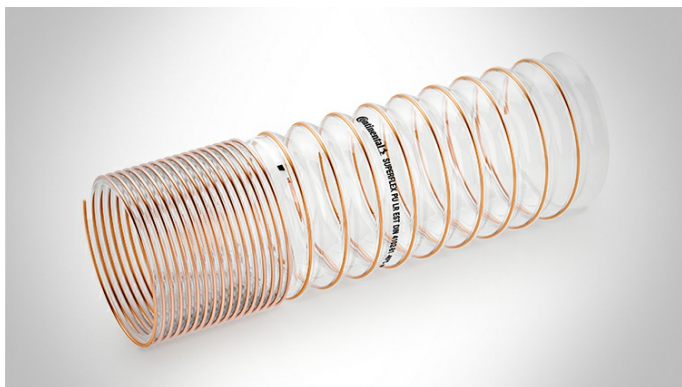

Polyurethane hose with copper-plated steel spiral, for suction and transport of dust, chips and abrasive material.

DETAILS

 SMOOTH SURFACE * *

 FLEXIBILITY * * * * *

 ABRASION RESISTANCE * * * * *

 TEMPERATURE RANGE -40 °C 90 °C

 CHEMICAL RESISTANCE PU Table

 CRUSHING RESISTANCE * *

 OZONE RESISTANCE * * * * *

 FLAME RETARDANT According to DIN -4102 IN B1 class

 ATEX According to the directions for use

 FOR FOOD EU according to Declaration of Conformity.

 O-PHTHALATE FREE * * * * *

 1:5
COMPACTED VERSION

Ø nominal mm	Ø nominal inch	Ø i.d. mm	Ø o.d. mm	vacuum 23 °C m/H ₂ O	bending radius mm	wall thickness mm	Ø steel wire mm	spiral pitch mm	spiral direction	weight meter g/m	coil length comp. m	Availability
25		26	30	0.4	5	0.35	1	9.5	left	100	6/10	On demand
30		31	35	0.3	7	0.4	1	14	left	120	6/10	On demand
35		36	40	0.28	8	0.4	1	14	left	140	6/10	On demand
40		41	45	0.25	10	0.4	1	14	left	150	6/10	On demand
45		46	50	0.23	12	0.4	1	14	left	190	6/10	On demand
50	2	51	55	0.2	13	0.4	1.2	18	left	185	6/10	In stock
55		56	60	0.18	14	0.4	1.2	18	left	200	6/10	On demand
60		61	65	0.16	15	0.4	1.2	18	left	220	6/10	In stock
63	2 1/2	64	68	0.15	16	0.4	1.2	18	left	230	6/10	In stock
70		71	75	0.14	18	0.4	1.4	18	left	330	6/10	On demand
76	3	77	81	0.1	19	0.4	1.4	18	left	350	6/10	In stock
80		81	85	0.1	20	0.4	1.4	18	left	370	6/10	In stock
90	3 1/2	91	95	0.1	22	0.4	1.4	18	left	420	6/10	In stock
100	4	102	106	0.09	20	0.4	1.6	23	left	480	6/10	In stock
110		112	116	0.09	22	0.4	1.6	23	left	520	6/10	In stock
115		117	121	0.09	23	0.4	1.6	23	left	545	6/10	In stock
120		122	126	0.09	24	0.4	1.6	23	left	550	6/10	In stock
125	5	127	131	0.08	25	0.4	1.6	23	left	590	6/10	In stock
130		132	136	0.08	26	0.4	1.6	23	left	610	6/10	On demand
140		142	143	0.08	28	0.4	1.6	23	left	660	6/10	In stock
150	6	153	158	0.06	30	0.5	1.8	30	left	700	6/10	In stock
160		163	168	0.06	32	0.5	1.8	30	left	750	6/10	In stock
170		173	178	0.06	34	0.5	1.8	30	left	780	6/10	On demand
180		183	188	0.06	36	0.5	1.8	30	left	830	6/10	In stock
200	8	203	208	0.05	40	0.5	1.8	30	left	920	6/10	In stock
220		223	228	0.05	45	0.5	1.8	30	left	1070	6/10	In stock
250	10	254	260	0.04	50	0.6	2	36	left	1250	6/10	In stock
280		284	290	0.04	55	0.6	2	36	left	1350	6/10	On demand
300	12	304	310	0.03	60	0.6	2	36	left	1500	6/10	In stock
315		319	325	0.03	62	0.6	2	36	left	1150	6/10	On demand
325		329	335	0.03	65	0.6	2	36	left	1600	6/10	On demand
350		354	360	0.03	70	0.6	2	36	left	1750	6/10	In stock
400		405	412	0.02	80	0.6	2	36	left	2000	6/10	In stock
450		456	462	0.01	90	0.6	2	36	left	2300	6	On demand
500		505	512	0.01	100	0.6	2	36	left	2500	6	In stock
550		555	562	0.01	110	0.6	2	36	left	2700	6	On demand
600		605	612	0.01	120	0.6	2	36	left	3000	6	In stock

All technical specifications apply to a temperature of 23° C ± 2° C (ISO 291)

All technical specifications contained herein are provided for reference purposes only.

For further details regarding our products' specifications, please refer to the relevant products' data sheets or contact your sales representative.